

An offshore oil rig is silhouetted against a dramatic sunset sky with orange and red clouds. The rig's complex structure of towers and cranes is visible against the bright horizon. The sea is dark with some whitecaps.

“Most reliable above and below the water line lubrication product range for reduced downtime.”

PSC SPECIALTY LUBRICATION RANGE

Created by Shivani Patnaik – Head Business Development
Copyright © Project Sales Corporation 2018; All Rights Reserved.



GUIDEBOOK INDEX

S.No	Slide Description
1	About Project Sales Corporation
2	Introduction to the PSC Lubrication Range
3	Brands in Our Portfolio
4	PSC Lubrication Product Range
4.01	TS Moly Application Areas
4.02	Gear Oil Additive for Triplex Mud Pumps
4.03	MD TOTCO W15 Fluid
4.04	QuinSyn Fluids
4.05	Riser, BOP Flange Bolts Lubricants – TS70
4.06	Sweeney Moly 503 Paste
4.07	Cameron TF-41 Choke Manifold Valve Grease
4.08	Climax Valve Lubricants – ‘K Sticks’
4.09	ZX1 Supergrease
4.10	Aquashield
4.11	Wire Rope Lubricant – Brilube 70
4.12	BestoLife Ultra 3010

GUIDEBOOK INDEX

S.No	Slide Description
4 >>	Brand Portfolio
4.13	Never-Seez Anti-Seize & Assembly Pastes
4.14	Molykote 111/321R Compounds
4.15	ASV Lubricants
4.16	Lubriplate Lubricants
4.17	Royal Purple Thermyl Tuff
4.18	NILS Grease
4.19	Mystik Grease
4.20	Belray Marine Grease
4.21	Mobil Polyrex™ EM / Vacuum Pump Oil
4.22	LPS Tapmatic
4.33	Fluid Film
4.34	TapMagic
4.35	Magnaseal BOP Valve Grease
4.36	DETCO Gold Grease
5	Contact Us

ABOUT PSC

Project Sales Corp is the India stockist for the most complete range of specialty lubrication products. We represent a host of well known brands in Indian Markets.



This presentation will take you through the key lubrication products we have that finds application in the marine and oil and gas industries and any industry that has applications in extreme loads, heat or moisture.

INTRODUCTION

Lubrication accounts for a small part of the overall maintenance budgets and the right lubricant goes a long way to reduce downtime, improve reliability and enhance equipment life.

Leading bearing manufacturers have conducted studies to find out the reasons for premature bearing failure. *More than one-third of bearing failures is due to imperfect lubrication.* In many more cases, which cannot be traced directly to imperfect lubrication, it's still the underlying cause.

Many applications require the use of a lubricant, which does not fail under the operating conditions. PSC presents exhaustive range of specialized marine and offshore lubricants for conditions such as continuous high temperatures, dust contamination, water ingress, very high loads, high humidity, extremely high speeds, etc to choose from. Use of the correct oil or grease can help extend your equipment life, and reduce your replacements, labour and downtime costs significantly.



BRANDS IN OUR PORTFOLIO



PSC LUBRICATION PRODUCT RANGE

From anti-seize and assembly pastes to valve lubricants, gear additives to wire rope lubricants and everything in between, a large stocking at our warehouse in Vizag and Kakinada ensures you get you are looking for quickly.

We exclusively stock

- Cameron Valve Lubricants
- Brilube
- Sweeney Paste
- TS Moly
- Never-Seez
- ZX1 and others.

The ultimate underwater lubricant, sealant and rust preservative – *Aqua lube now known as Aquashield* is available in 5oz tubes and 37 lbs pails. Its' so sticky it will not get washed off by water. Used by most seaplanes in India.

When you need the best lubricant for your offshore wire ropes, cranes, rigging materials, chose the product from the leading wire rope manufacturer, ***Bridon – Brilube 70***. Formulated for long life on static or dynamic ropes in highly aggressive environments. BRILUBE 70 is recommended for use in off-shore and other hostile environments where effective lubrication and optimum protection are vital. Effective operating range -55°C to +100°C Minimum application temperature -20°C. 12.5 kg pails.

PSC stocks ***K grease stick from Climax*** and ***Cameron TF-41 part #700668***, you can use them to lubricate most of your plug valves and gate valves and for choke manifold use.

When you need precise torque in your riser bolts, bop bolts or other torque critical applications, we have the most extensive range of thread lubricants from ***TS-Moly*** and ***Sweeney***. From ***TS-70*** to ***Moly 503***, or the regular anti-seizes from ***Molykote***, ***Never-Seez***.

Mud pumps and large gear boxes require TS-Moly gear additives to minimise pitting. You will find ***TS-90 moly additive*** with us. To lubricate your critical bearings, we have multi-purpose greases from ***Mystik*** in pails and cartridges that can handle high loads, high temperatures, water splashes and more.

We also have ***Quincy PG Synthetic oils*** in ready stock.

TS MOLY APPLICATION AREAS

Riser & BOP Bolts, Mud Pumps, Top Drives, Jacking System, Skidding, Gate Valves, Sheaves and Wire Ropes

Equipment	Suggested Lubricants
Mud Pumps Gear Box	TS-90
Bolts all equipment	TS-70
Jacking System	
Primary Gear Box	TS-90 or TS-319
Secondary Gear Box	TS-90 or TS-319
Pinion Gear Shaft	TS-65 or Ts-333
Rack	TS-210 or TS-209
Hydraulic Power Slip	TS-210 or TS-209
Riseer tensioners wire rope	TS-210
Breech-Clock style riser connection	TS-63
Crown Block Sheave	TS-116
Drill String Compensator pin	TS-70
Top Drive	TS-90

Equipment	Suggested Lubricants
Agitator	TS-90
Anchor Winch	TS-65 or TS-116
Fixation System	TS-210 or TS-334
Cantilever Skid Rails	TS-264
BOP Transporter (Skidding Type)	TS-264
Packing of swivel wash pipe assembly	TS-66V
Underwater Fairlead	TS-334, TS-116
Chike and kill manifold valves	TS-66V
Chains	TS-602 or TS-65
Wash Pipe	TS-801 or TS210
Wire Ropes	TS-65 or TS-210
Slings	TS-480
Travelling Block	TS-65 or TS-116

GEAR OIL ADDICTIVE FOR TRIPLEX MUD PUMPS

Newly machined gears often go through a phase of initial running-in wear due to metal to metal contact. In the case of heavily loaded gears also the oils are not able to provide the separating film between the tooth surfaces. Therefore the use of an additive that can provide a separating film or assist in plastic deformation helps. Molybdenum disulphide with a natural affinity for metal is the best option due to its very high load handling characteristics.

TS-90 Moly Gear Concentrate (Additive) that can be used to newly machined or heavily loaded gears to minimise friction; reduce gear wear; protection during intermittent, extreme operating conditions; reduce gear noise levels and improve energy efficiency and prolong equipment life.

Available in 5 gallon plastic pails (35 lbs) from stock. **Priced at ₹ 37,500/- per pail + GST.**



Issue: During the initial mud pump “wear-in” period, it is common to see initial pitting on the tooth faces of Triplex Mud Pump gears.

Solution: It is National Oilwell Varco’s recommendation to use a **Molybdenum Disulfide oil additive with the Mud Pump Oil** during initial running and when signs of corrective (also known as “initial”) pitting are observed on Mud Pump gears. The oil additive will help to polish the gear tooth surfaces and in some cases, if used in the initial Mud Pump “wear-in” period, can reduce the amount of initial pitting common Mud Pump gears.

MD TOTCO W15 FLUID

Martin Decker All Purpose W15 Fluid

Martin Decker W15 Red All Purpose Fluid from MD TOTCO for weight indicator sensors, lubricators on rig floor, mud pump and stand pipe pressure gauge, etc

1 Quart OEM Packs = 943ml

4 Quarts = 1 Gallon (when ordering for 1 Gallon, PSC will supply 4 of 1 Quarts packs)

Priced at ₹ 2400/- per Quart + GST.

GENERAL INFORMATION

- **Physical State** : Liquid
- **Color** : Red
- **Relative Density (at 15 °C)** : 0.88
- **Flash Point [Method]** : >94°C (201°F) [ASTM D-92]
- **Solubility in Water** : Negligible
- **Viscosity** : 13 cSt (13 mm²/sec) at 40 °C | 5 cSt (5 mm²/sec) at 100°C
- **Pour Point** : -63°C (-81°F)



QUINSYN FLUIDS

Advantages of Quinsyn fluids

- **Long Life** - All QuinSyn original equipment fluids are designed for extended drain intervals, even at elevated operating temperatures.
- **Non-Varnishing** - Varnish is brownish build-up that plagues compressors with low-quality fluids. Varnish clogs coolers, raising temperatures. It also can block internal passages and destroy bearings. Premium base-stocks prevent or eliminate this fear, an original equipment advantage.
- **Efficient Heat Transfer** - Rotary screw compressors utilize their fluid to reject the heat-of-compression. Low quality mineral oils do not conduct heat as well as QuinSyn Genuine synthetics.
- **Material Compatibility** - All QuinSyn original equipment fluids are compatible with all gaskets, seals and elastomers used not only in all Quincy compressors, but also most other OEM models.
- **Reduced Oil Carryover** - Top of the line base stocks, coupled with advanced additives, create a fluid with very low foaming rates. This translates to reduced oil carryover in rotary screw applications - which means less maintenance and expenses for you.
- **Cross Compatible** - Field experience has shown QuinSyn Genuine fluids are compatible with nearly every compressor OEM in service today.

QuinSyn® PG

QuinSyn® PG is a custom-blended polyalkalene glycol (PAG) and polyester (POE) fluid. This formulation is ideal for hot and humid environments and offers excellent lubrication at high and low temperatures, reduced volatility and a high viscosity index. QuinSyn PG will not leave behind carbon residue or varnish when it oxidizes. It is also excellent choice for applications where varnishing has occurred in the past.

Priced at ₹ 60,000/- per pail + GST.



RISER, BOP FLANGE BOLTS LUBRICANTS – TS70

TS-70 Moly Paste is a thread compound with 70% molybdenum disulfide, NLGI No.2, especially suitable for wet or corrosive conditions, including subsea applications. It has highly consistent torque values for makeup and breakout.

TS-70 is a general purpose moly paste with many uses. It has proven to be an outstanding lubricant for a saltwater environment, above and below the surface: subsea riser, BOP, flange equipment and structural bolts. Other applications are components for press fittings, threads in tapping, boundary lubricating of parts in assembly and make-up, bushings of heavily loaded slow moving bearings, and many more. Apply by brushing or burnishing.

TS-70, with 70% by weight of molybdenum disulfide, provides uniform and durable boundary lubrication under extreme pressure, in wet or corrosive environments, and over a wide temperature range. Its coefficient of friction nearly approaches that of pure MoS₂, and superior wear protection is assured. TS-70 does not contain metals.

Pack Size – 4lbs Priced at ₹ 13,500/- per pack + GST; 52lbs Priced at ₹ 1,55,800 per pack + GST.



SWEENEY MOLY 503 PASTE

Sweeney Anti-seize lubricants are combinations of oil-base and solid lubricants that produce a hybrid suited for static joints including threaded surfaces, press fits, slip fits, transmission joints and gaskets.

503 Moly Paste Lubricant contains 65% solid lubricants suspended in a soft paste. A heavy, black paste with unsurpassed lubricating qualities, 503 is our most efficient lubricant in reducing friction. On threaded fasteners (bolts, nuts, studs) the low uniform friction coefficient of 0.06 creates reliable assembly conditions. The lubricant then stays in place through heat, load and vibration to insure trouble free disassembly.

APPLICATIONS :

Press fits ● threaded fasteners ● slip fits ● metal-working (including drawing, stamping, coining, extruding, and forging by lower friction, and eliminating scratching, galling, and metal pick-up) ● splines and gears.

Recommended for BOP Bolts, Risers, and several offshore applications.

Pack Size 3.8 lbs. Available from ready stock.

Project Sales Corp has also re-exported this product to several countries.

Priced at ₹ 21,000/- per 3.8 lb pack + GST.



CAMERON TF-41 CHOKE MANIFOLD VALVE GREASE

Project Sales Corp imports and stocks the OEM Product - Cameron Valve Lubricant TF-41 for use in subsea lubrication application for choke/manifold usage. Made in USA. Excellent resistance to crude and fair resistance to H₂S (sour crude or gas).

Available in 20 lb pails. PART# 700668.

Priced at ₹ 24,800/- per pail + GST



CLIMAX VALVE LUBRICANTS – “K” STICKS

PSC #900M ‘K’ stick - 1-1/2" dia x 12" long for Hydrocarbons Service

An all-purpose High Temperature Hydrocarbon and Natural Gas lubricant. Recommended for Natural Gas Pipelines (gas condensate, and/or water), Refineries, Gasoline Plants, Petrochemical Plants, Crude Oil Production, Rubber Plants, Compressor Discharge Valves, Dehydrator Valves, Steel Mills, Amines/Diluted Acids, Tailing Systems all w/concentrations of H₂S, CO₂. The material is suitable for use in Plug, Ball and API Gate Valves; both as a body fill and seat lubricant. Used with low torque plug valves (alternative to Halliburton part #70.31058)

Used with asphalt, carboic acid, cellulose acetate, coal tar, cutting oils, fuel oil pitch, tar, natural gas, petroleum, and general hydrocarbon service. PSC-900M K-stick 1-1/2"Dia X 12" Long. Sold per stick. Available in stock. "K" stick grease fits the 10516 series, 1700K series, Rocket 280/380 series guns.

Priced at ₹ 1350 each + GST

NON TOXIC-HAZARDOUS MATERIAL ● FLASH POINT ABOVE 400 DEG.F. ● NON FLAMMABLE ●
Manufactured - U.S.A.

- BASE OIL – Synthetic
- SHELF LIFE – 5 Years
- Oxidation Stability Good
- TEMPERATURE RANGE – 40 DEG.F.TO +650 DEG.F.
- PENETRATION (ASTM 220-250) NLGI GRADE #3
- FILLER - MOLYBDENUM-DISULFIDE
- COLOR – Black



Also available #800XH ‘K’ alternative to FMC part #3256666 size;

Priced at ₹ 1450 each + GST

ZX1 SUPERGREASE

ZX1 SuperGrease has a shear strength to cater for peak loads well beyond the scope of other grease.

Features of ZX1 SUPERGREASE

- Provides extreme pressure lubricity
- Protects all bearings and machinery
- Virtually eliminates friction and wear
- Lubricates and protects beyond the melt point of conventional greases
- Prevents salt water ingress
- Resists harsh chemicals and acids
- Prolongs component & lubricant life
- Extends maintenance levels
- Reduces downtime and service

Priced at 400 Grams Cartridges ₹ 1500 each + GST
500 Grams Tubs ₹ 1800 each + GST
12.5 Kg Buckets ₹ 36,000 each + GST



AQUASHIELD (FORMERLY AQUA LUBE GREASE)

Lubricates. Seals. Inhibits Rust. Waterproof

AQUASHIELD is a multi-purpose lubricant and sealant that is compounded specifically to cling to metal and “O” ring surfaces, provide long term lubrication, and rust protection. It is designed to seal out water and contaminants. Excellent shear stability over long periods. Retains its consistency whether in use or at rest.


AQUASHIELD is extremely effective in any application where bearings or gears are affected by wet conditions such as motors, and valves that must operate in hot or cold water, steam, pool chemicals, or salt water.

APPLICATIONS

- ROV/ Manipulator Arms
- Bearings
- Water filters
- “O” rings
- Valves

Pack size priced at

- 5oz tubes ₹ 1250 + GST
- 14oz Cartridge ₹ 2500 + GST
- 37 lb pails ₹ 32,500 + GST

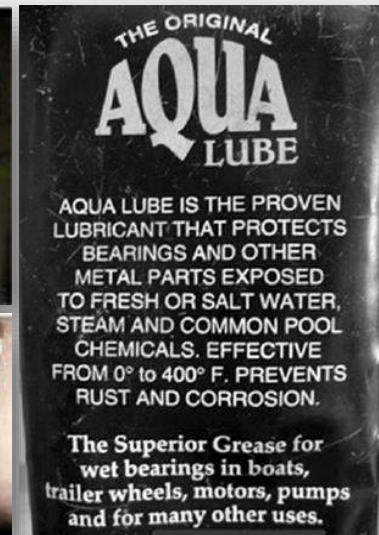

Caution - this is extremely tacky waterproof grease, use gloves to apply as it's very difficult to wash off. Remember its made to work underwater without washout. We have found that mineral spirits works to remove from hands if you didn't read the warning first.

WIRE ROPE LUBRICANT – BRILUBE 70

BRILUBE 70 - a medium thixotropic gel lubricant with stable properties over a wide temperature range offering corrosion protection against marine working conditions. Formulated for long life on static or dynamic ropes in highly aggressive environments.

BRILUBE 70 is recommended for use in off-shore and other hostile environments where effective lubrication and optimum corrosion protection are vital. Effective operating range -55°C to +100°C Minimum application temperature -20°C.

Brilube 70 can be pressure applied using in-line application systems which are available to suit a wide range of rope sizes and constructions. These systems operate by forcing the lubricant into the rope under high pressure, whilst simultaneously cleaning the rope and removing the moisture, residual lubricant and contaminants.

Benefits -

- Advanced corrosion protection
- High lubricity
- Reduced fling off
- Enhanced rope life
- Effective penetration
- Easy application

Packed in pails, net weight 12.5 kgs

Priced at ₹ 28,800 each + GST

Also available Brilube 90 at ₹ 42,500 per pail + GST with 3 weeks lead time.



BESTOLIFE ULTRA 3010

Metal Free Dope

BESTOLIFE 3010[®] Ultra is a non-metallic thread compound for rotary-shouldered connections and is effective for jack up systems. Heavy metal free for environmental concerns, the compound excels in low temperature and high temperature environments. 3010[®] Ultra prevents galling and seizing on even, non-magnetic surfaces, forming a gasket-like seal in a rotary connection for maximum protection in rough conditions.

APPLICATIONS

- Non-metallic compound for rotary-shouldered connections in cold, wet conditions.
- Recommended for all drilling applications (rotary-shouldered connections), including high temperature environments.

PRODUCT CHARACTERISTICS

Color: Black; Penetration: 320-350 (ASTM D 217)

Weight/Gallon: 10.4 pounds/gallon

Dropping Point: 310°F/154°C (typ)

Flash Point: 330°F/166°C (min)

Brushable To: -49°F/-45°C

Friction Factor: 1.0 (per API RP 7A1)

Contains: Amorphous and synthetic graphite and other non-metallic additives

Available in 35lb pails priced at ₹ 17,000 per pail + GST




NEVER-SEEZ ANTI-SEIZE & ASSEMBLY PASTES

Project Sales Corp imports and stocks the complete range of Bostik Never-Seez® range in India.

Never-Seez contains very fine metallic particles in a special hydrocarbon carrier which seals and protects metal parts under the most extreme conditions of heat, pressure, and contamination. The fine, protective film of Never-Seez cannot be burned off or completely removed by abrasion. Never-Seez cannot be washed off by fresh or salt water. The protective coating will remain, even after extended exposure to the elements. Application of Never-Seez insures trouble-free protection against seizure, corrosion, pitting, and galling of metal parts.

Available in stock –

- Never-Seez Regular Grade in **8 lbs priced at ₹ 18,000 each, 42lbs - ₹ 48,000 each + GST**
- Never-Seez Mariner's Choice in **8oz / 16oz with 3 weeks lead time POR**
- Never-Seez Pure Nickel Special in **8oz priced at ₹ 3000 each / 16oz - ₹ 4500 each + GST**
- Never-Seez Blue Moly Paste in **16oz priced at ₹ 5500 each + GST**
- Never-Seez Black Moly Paste in **16oz priced at ₹ 5500 each + GST**

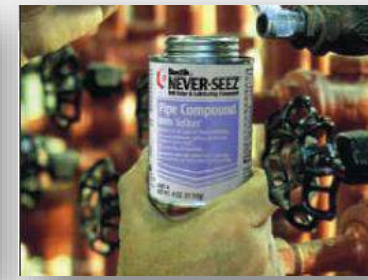

MOLYKOTE® 111 COMPOUND

Silicone-based compound, heavy consistency

Features

- Wide service temperature range (-40°C/-40°F to 200°C/392°F)
- Excellent water resistance
- Compatible with many plastics and elastomers
- Low vapor pressure
- Low volatility
- Meets several global standards for water contact

1 Kg pack priced at ₹ 2450 each + GST



MOLYKOTE® 321R COMPOUND

Air dry coating for high temperature applications (MRO & OEM)
Air-curing dry film lubricant.

Features

- Air drying
- Avoidance of stick-slip
- High aging resistance

400ml spray can priced at ₹ 1050 each + GST



ASV LUBRICANTS

ASV manufactures an extensive line of industrial lubricating greases based on traditional mineral oils as well as new generation, high tech synthetic base fluids as esters, glycols, synthetic hydrocarbons, PFPEs, silicones and are designed for use under extreme conditions like high temperature, extreme pressure, low and high temperatures, low to high speeds, aggressive and chemical environment.

ASV Brush Top Anti-Seize

Copper powder solid lubricants partly synthetic oil inorganic thickener.

For assembly of all threaded connections exposed to high temperatures and corrosive conditions to make disassembly easy and non-destructive even after long operational periods. Prevents bolt breaking, sintering, fusion, seizure, thread striping and distortion of threads. Protects from corrosion even when exposed to saline conditions.

ASV Copr-Lube 500grms Brush top tin priced at ₹ 750 each + GST

ASV Wire Rope Lubricant

An extreme pressure grease for adhesive, semi fluid simultaneous lubrication and corrosion protection of wire ropes. Penetrates rapidly through wire rope strands to leave a completely water resistant lubricating film which provides both internal as well as external lubrication & corrosion protection. Forms a film protective and lubricating waterproof over the surface which does not emulsify even if submerged in water

5Kg pack priced at ₹ 2500 each + GST



LUBRIPLATE 630AA MULTI-PURPOSE GREASE


LUBRIPLATE No. 630-AA is an NLGI No. 1 lubricant and the most popular multipurpose general grease. Ideal for automatic dispensing systems and centralized systems with large lines.

Advantages

- Water resistant.
- Excellent grease mobility in constant service applications.
- High anti-wear for extra lubricity.
- Oxidation inhibited.
- Wide operating temperature range.

Available in 35 lb pails priced at ₹ 24,500 each + GST

Also available small packs of 930 A, AA and AAA Greases; price on request.

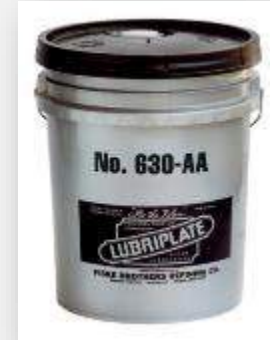

ROYAL PURPLE THERMYL TUFF®

Thermyl-Tuff® is recommended for heavily loaded open gears, skid rails, bushings, couplings, bearings, cables, etc., or low speed bearings operating at high temperatures.

Thermyl-Tuff® is a viscous, tacky, semi-fluid lubricant that protects extremely heavily loaded sliding surfaces such as open gears, skid rails, etc., where other EP products perform poorly or even fail.

Thermyl-Tuff® cannot be washed off by water, and its superior, synthetic corrosion inhibitors provide outstanding protection in wet and / or corrosive environments. It is formulated with SYNSLIDE®, Royal Purple's proprietary, noncorrosive, EP additive technology.

5 Gallon pails Thermyl Tuff 200 priced at ₹ 42,500 each + GST



NILS

NILS Dimension Grease, 400grms Cartridge

DIMENSION GREASE is Lithium complex thickener and synthetic oil based grease. It has excellent mechanical stability, anti wear properties as well as outstanding stability on high temperatures permit to prolong lubricant intervals, if this product is used, up to 3-5 times.

PROPERTIES:

Very good adhesiveness ● oxidation resistance ●
excellent water resistance ● excellent anti corrosive
properties ● exceptional behaviour on high temperatures
● outstanding resistance to vibrations at heavy load ●
high d/n factor.

DIMENSION GREASE can be used for all types of journal bearings and roller bearings and is therefore really universal grease.

400 grams Cartridge priced at ₹ 1900 each + GST



NILS

NILS Lithoplex, 400grms Cartridge

LITHOPLEX is special completely synthetic grease with excellent performances. Characteristics: excellent wear and oxidation resistance; low start resistance even at low temperatures; excellent mechanical stability; insolubility in water; outstanding protection against corrosion; stability on high temperatures.

APPLICATIONS:

- LITHOPLEX Grease is suitable for use in applications operating under heavy conditions (for example on continuous high working temperature equipment around +180°C).
- LITHOPLEX is outstanding product formulated for the lubrication of roller and friction bearings, articulated machinery joints, industrial plants, electrical engines bearings, pumps, ventilators, tool mandrels and life lubrication of roller bearings with high rpm value of d/n factor – 11,50,000.



400 grams Cartridge priced at ₹ 3500 each + GST

MYSTIK GREASE

Mystik General Purpose Grease

Mystik General Purpose Grease is a very economical multi-purpose grease especially suited for normal temperature/speed conditions and non-critical service applications. This product is economical for applications requiring frequent re-greasing due to a contaminating environment.

- Water Insoluble
- Economical

Pack Size 400 grams cartridge priced at ₹ 250 each + GST
35 lb pails at ₹ 10,500 each + GST



Mystik JT-6 Multi-purpose Grease

Mystik JT-6 Multi-Purpose Grease is our most water resistant and water insoluble product. It is light colored, low staining, and has a very low oil separation rate. Mystik JT-6 Multi-Purpose Grease provides excellent anti-seize protection under high loads. Outstanding adhesion enables this product to stay in place better than most other greases. This product is a medium temperature range multipurpose grease for extreme pressure loads and slow to medium speed bearings.

Pack Size 400 grams cartridge - ₹ 350 each + GST
450 grams tub - ₹ 450 each + GST



Mystik JT-6 Marine Grease

Mystik JT-6 High Performance Marine Grease is a smooth but tacky blue grease with outstanding water resistance. It is designed to provide excellent lubrication for greased chassis points and other wet-environment applications.

Pack Size 3oz cartridge priced at ₹ 250 each + GST
400 grams cartridge at ₹ 450 each + GST
1 lb tubs at ₹ 500 each + GST



BELRAY MARINE GREASE

Bel-Ray Waterproof Grease is the legendary high-performance, multi-purpose grease. Superior water resistance, even in salt water, will ensure continued sealing and protection. Perfect for wheel bearings, headsets, shock linkages, swing arm pivots and other motorcycle, ATV, snowmobile and marine chassis lubrication points. Due to its aluminium complex formula, it won't melt or run out. Enhanced mechanical stability and special anti-wear additives protect and lubricate bearings for improved performance.

Pack Size 400 grams cartridge priced at ₹ 550 each + GST



MOBIL POLYREX™ EM

Super-premium Mobil Polyrex™ EM Series greases are specially formulated for electric-motor bearings. The advanced thickener formulation and proprietary manufacturing techniques provide improved bearing performance and protection for long electric motor life.

Features

Outstanding grease life ● Advanced polyurea thickener ● Excellent corrosion resistance ● Low-noise properties

Pack Size 400 grams cartridge priced at ₹ 900 each + GST



MOBIL VACUUM PUMP OIL

Mobil Vacuum Pump Oil 100 is a premium lubricant, blended from specific high quality white oil with low volatility characteristics, for the lubrication of vacuum pumps.

Features

Low volatility characteristics ● Good air release properties to provide efficient pump operation ● Good demulsibility to separate quickly from water and resist emulsion formation ● Good wear protection under start-up and boundary conditions ● Long service life due to high level of chemical and thermal stability and freedom from deposit formation.

PSC also stocks Kluber and Lubrilog lubricants.

Pack Size 1 Quart (0.946L) priced at ₹ 1750 each + GST



LPS TAPMATIC

Tapmatic® AquaCut

3-In-One Tapmatic® AquaCut cutting fluid is a water-based fluid that provides clean cuts and fine finishes. It is recommended for use in applications where cooling of the tool is required. Compatible with steel, aluminium, and most other metals, except magnesium. Does not contain sulphur, chlorine, or chlorinated solvents. Corrosion inhibitors prevent flash rusting. Will not stain metal. Non-flammable, with cinnamon scent.



Features

Water-Based Formula ● Excellent In Applications where cooling of the tool is desired ● Non-Flammable ● Non-Hazardous ● Does Not Contain Sulphur, Chlorine, Or Oils ● Safe On All Metals, Except Magnesium ● Corrosion Inhibitors Prevent Flash Rusting ● Provides Fine Finishes ● Cinnamon Scent.

Pack Size 16oz priced at ₹ 1750 each + GST

Tapmatic Gold Cutting Fluid

Excellent for steel and aluminium. Protects and lubricates, reducing friction and eliminating chip welding in tapping, drilling, reaming, and threading. Does not contain CFCs, chlorinated paraffins, water, solvents, or inactive fillers. Safe to use on all metals.



Features

Great for all metals including aluminium ● Increases tool life and improves surface finish ● Requires less product usage than traditional cutting fluids ● Does not contain chlorinated paraffins ● Reduces cutting torque and improves cutting efficiency ● Does not contain water, solvents, or inactive fillers ● Excellent for tapping applications.

Pack Size 16oz priced at ₹ 1750 each + GST

FLUID FILM CORROSION INHIBITOR

Fluid Film is a penetrant and lubricant also used for corrosion prevention. The long lasting product contains no solvents, is designed to keep from drying out, and will penetrate to the base of all metals, providing corrosion protection from both natural and industrial atmospheres. Heavily corroded and/or frozen parts such as nuts, bolts, shafts, etc. that would normally be damaged during maintenance, can be salvaged by applying Fluid Film. It has been used for over fifty years in the highly corrosive marine environment of ships and offshore drilling rigs.

Pack Size 8oz priced at ₹ 1250 each + GST

TAPMAGIC

Tap Magic EP-Xtra® is an ozone-friendly formula that provides outstanding performance on all cuts and all metals - even hard metals such as stainless steel. The proprietary additive, EP-Xtra, provides a synergistic boost in performance. A heavy duty and versatile formula that performs incredibly on all metals and in any operation. No matter what application you have in mind, Tap Magic EP-Xtra can take care of it.

Applications:

Highly effective for drilling ● tapping ● milling - all cuts on all metals.

This is the fluid to have when you don't know what cut or what metal tomorrow may bring.

Pack Size 4oz priced at ₹ 900 each + GST; 16oz - ₹ 1750 each + GST



MAGNASEAL PLUS GREASE FOR BOP VALVES

High performance lubricant with complex base, synthetic PTFE, polytetrafluoroethylene, with lubrication recycling, non-polluting for use in BOP valves, submerged in fresh water or salt water under the strictest international standards.

The Magnaseal Plus MSP-40 grease is a recommended lubricant in the BOP gate valves. It is used to lubricate bearings during the body cavity lubrication. Magnaseal Plus increases the service life of the valves.

Pack Size 40lbs priced at ₹ 1,10,000 each + GST



DETCO GOLD GREASE 1891

Gold grease is an excellent non-melt grease specially formulated with extreme pressure and anti-wear additives to provide heavy duty service. This product has extra tackifiers to provide excellent adhesive and cohesive properties.

Features:

Excellent outdoor resistance ● Extreme pressure ● High heat resistance and Water resistance ● Exceptional resistance to acid, water, saltspray, weather, dirt, dust, stream and oxidation ● Seals out dust-dirt-contaminants ● Prolongs life of metal parts ● Exceptional adhesive-cohesive and anti-wear properties ● Gives extra cushioning that reduces shock and noise ● Performs at a wide variety of temperatures ● High shock and impact resistance ● No pound out or thin out ● Contains special corrosion and rust inhibitors.

Pack Size 40lb pack priced at ₹ 45,500 each + GST



CONTACT US

Customer Support Reps

Ranga (+91) 891-2564393

Price Quotes

Deepti Rai (+91) 91009-32334

Product Support

Anil (+91) 98664-67276

Shivani (+91) 891-2566293

Satish (+91) 98851-49412

Do not hesitate to email us at

sales@projectsalescorp.com

To know more please log on to

www.projectsalescorp.in

VISAKHAPATNAM

28, Founta Plaza, Suryabagh,
Visakhapatnam.

Andhra Pradesh. INDIA

PIN – 530 020

KAKINADA

Plot 154, Opp. Schlumberger Asia
Services, Vakalapudi, Kakinada.

Andhra Pradesh. INDIA

PIN – 533 005

CONNECT WITH US!



Disclaimer:

All visual content used there are taken from internet or the respective company's website and are copyrighted to it's respectful owners.
All Brand names, images, logos, product designs are registered trademark of their respective owners and are used for reference purpose only.